


Wilco Precast



> Delivery Parameters


Maximum precast panel sizes are determined by the ability to be able ship them to site. As they must be delivered on A frames, there two trucking options to be considered:

1. Flat deck, maximum allowable height when loaded of 4800 mm; maximum panel size 13500 mm x 3150 mm; maximum weight 20 tonnes.
2. Low loader, maximum allowable height when loaded of 5400 mm; maximum panel size 8800 mm x 4150 mm; maximum weight 18 tonnes. Read notes on drawing.

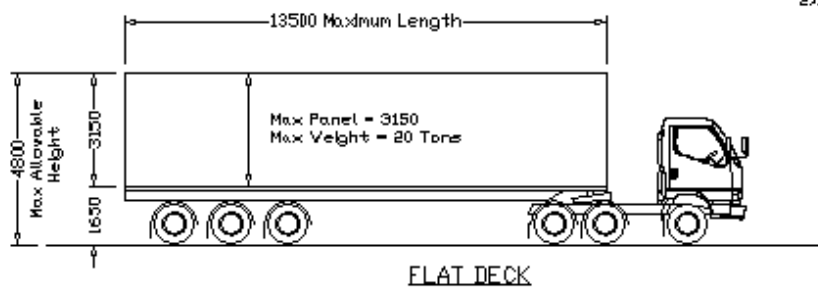

NOTE

- 1). No Permit up to 4250 Height
- 2). If Permit required travel restricted to 9am to 4pm

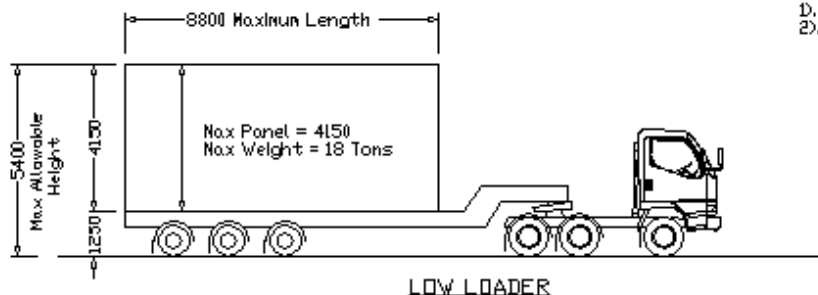

NOTE

- 1). No Permit up to 4990 Height
- 2). With Permit 5400 (Require Pilot, Power Board, Traffic Police) Cost Incured.

